

磁阻式/114系列




主要参数 (main parameters)

推荐型号 (Recommended models)	114XU9734		114XU9736	
极对数 (Pole)	3	4	5	6
励磁电压 (Input voltage)	AC7Vrms			
励磁频率 (Input frequency)	10KHz			
变压比 (Transformation ratio)	0.286 ± 10%			
电气误差 (Accuracy)	40'	30'	25'	20'
相位移 (Phase shift)	0°	≤10°	0°	≤15°
输入阻抗 (Input impedance)	(110 ± 17) Ω	(210 ± 32) Ω	(130 ± 20) Ω	(120 ± 18) Ω
耐电压 (Dielectric strength)	AC 500V 1min			
允许最大转速 (Max operating speed)	20000 rpm			
工作温度范围 (Operating temperature range)	-40℃~+155℃			

外形及安装尺寸图 Outline(dimension:mm)

定子外形及安装尺寸图

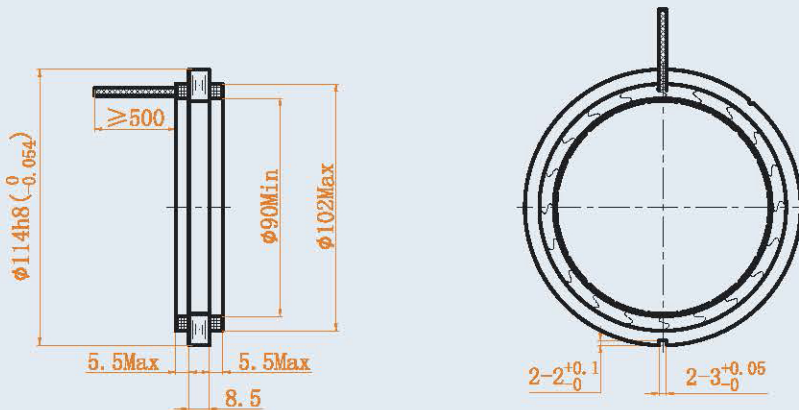

转子外形及安装尺寸图

