

磁阻式/135系列（塑封引线型）





主要参数 (main parameters)


推荐型号 (Recommended models)					
极对数 (Pole)	2	3	4	5	6
励磁电压 (Input voltage)	AC7Vrms				
励磁频率 (Input frequency)	10KHz				
变压比 (Transformation ratio)	0.286±10%				
电气误差 (Accuracy)	60'	40'	30'	25'	20'
相位移 (Phase shift)	≤10°	≤10°	≤12°	≤8°	≤5°
输入阻抗 (Input impedance)	(140±21)Ω				
耐电压 (Dielectric strength)	AC 500V 1min				
允许最大转速 (Max operating speed)	12000 rpm				
工作温度范围 (Operating temperature range)	-40℃~+155℃				

外形及安装尺寸图 Outline(dimension:mm)

定子外形及安装尺寸图

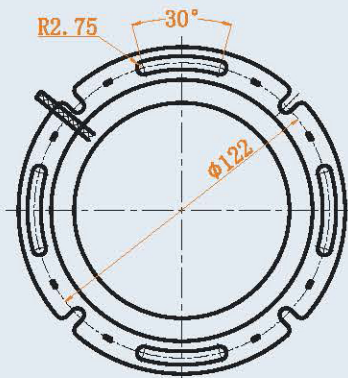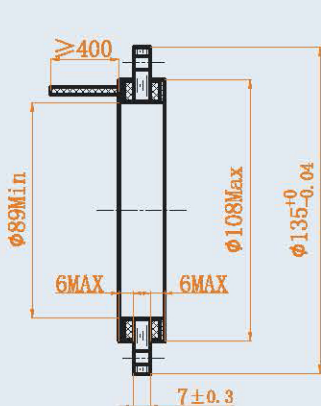

转子外形及安装尺寸图

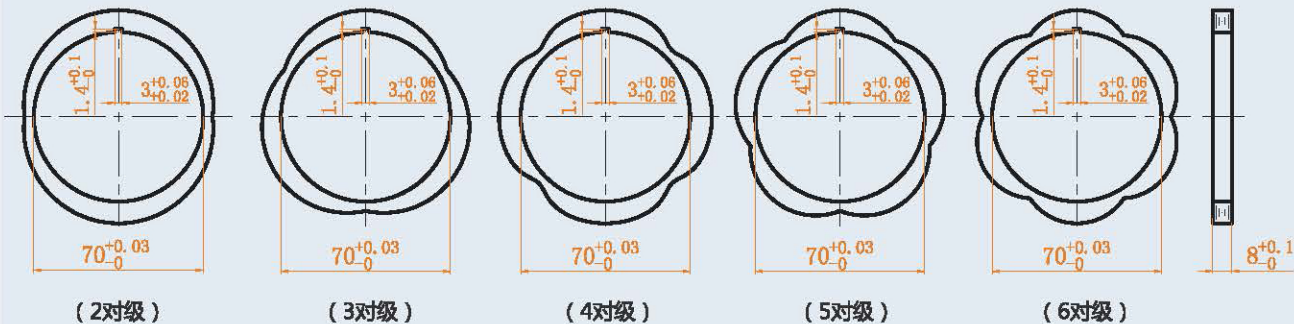

磁阻式 VR RESOLVER