



磁阻式/37系列 A型 (塑封引线式)





主要参数 (main parameters)


推荐型号 (Recommended models)	J37XU9732	J37XU9733	J37XU9734
极对数 (Pole)	2	3	4
励磁电压 (Input voltage)	AC7Vrms		
励磁频率 (Input frequency)	10KHz		
变压比 (Transformation ratio)	$0.286 \pm 10\%$		
电气误差 (Accuracy)	60'	40'	30'
相位移 (Phase shift)	$\leq 5^\circ$		
输入阻抗 (Input impedance)	$(140 \pm 21) \Omega$	$(160 \pm 24) \Omega$	$(120 \pm 20) \Omega$
耐电压 (Dielectric strength)	AC 500V 1min		
允许最大转速 (Max operating speed)	20000 rpm		
工作温度范围 (Operating temperature range)	$-40^\circ\text{C} \sim +155^\circ\text{C}$		

外形及安装尺寸图 Outline (dimension:mm)


定子外形及安装尺寸图

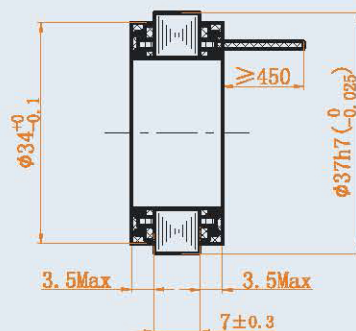


转子外形及安装尺寸图



(2对级)



(3对级)



(4对级)

