

磁阻式/37系列 B型 (A型加装机壳)




主要参数 (main parameters)

推荐型号 (Recommended models)	J37XU9732B	J37XU9733A	J37XU9734F
极对数 (Pole)	2	3	4
励磁电压 (Input voltage)	AC7Vrms		
励磁频率 (Input frequency)	10KHz		
变压比 (Transformation ratio)	0.286 ± 10%		
电气误差 (Accuracy)	60'	40'	30'
相位移 (Phase shift)	≤ 5°		
输入阻抗 (Input impedance)	(140 ± 21) Ω	(160 ± 24) Ω	(120 ± 20) Ω
耐电压 (Dielectric strength)	AC 500V 1min		
允许最大转速 (Max operating speed)	20000 rpm		
工作温度范围 (Operating temperature range)	-40°C ~ +155°C		

外形及安装尺寸图 Outline (dimension:mm)

◆ 定子外形及安装尺寸图

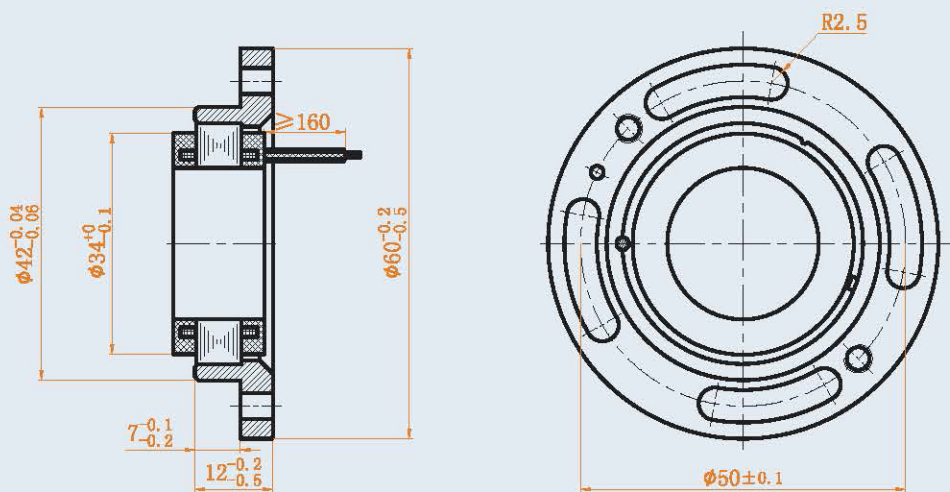

◆ 转子外形及安装尺寸图

