



磁阻式/37系列 C型（引线端子型）




主要参数 (main parameters)

推荐型号 (Recommended models)			
极对数 (Pole)	2	3	4
励磁电压 (Input voltage)	AC7Vrms		
励磁频率 (Input frequency)	10KHz		
变压比 (Transformation ratio)	$0.286 \pm 10\%$		
电气误差 (Accuracy)	60'	40'	30'
相位移 (Phase shift)	0°	$\leq 5^\circ$	0°
输入阻抗 (Input impedance)	$(140 \pm 21) \Omega$	$(160 \pm 24) \Omega$	$(120 \pm 20) \Omega$
耐电压 (Dielectric strength)	AC500Vrms 1min (500V AC rms for one minute)		
允许最大转速 (Max operating speed)	20000 rpm		
工作温度范围 (Operating temperature range)	$-40^\circ\text{C} \sim +155^\circ\text{C}$		

外形及安装尺寸图 Outline(dimension:mm)

定子外形及安装尺寸图

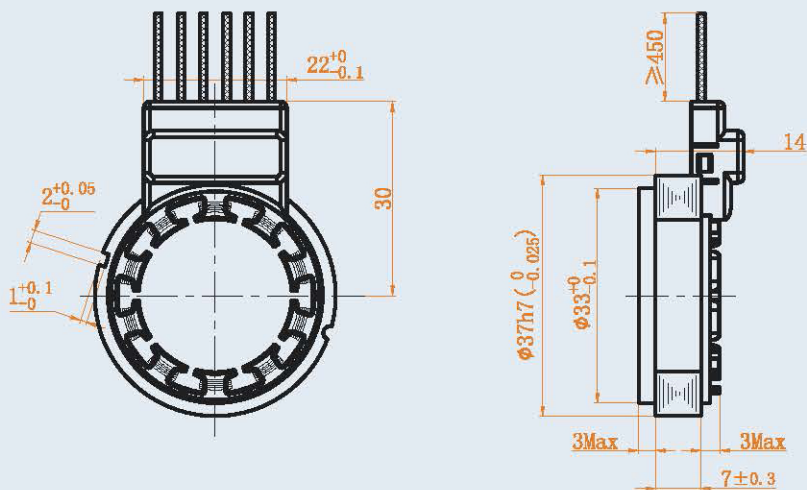

转子外形及安装尺寸图

