

磁阻式/37系列 D型（C型加装机壳）




主要参数 (main parameters)

推荐型号 (Recommended models)			
极对数 (Pole)	2	3	4
励磁电压 (Input voltage)	AC7Vrms		
励磁频率(Input frequency)	10KHz		
变压比 (Transformation ratio)	0.286±10%		
电气误差 (Accuracy)	60'	40'	30'
相位移 (Phase shift)	0°	≤5°	0°
输入阻抗(Input impedance)	(140±21)Ω	(160±24)Ω	(120±20)Ω
耐电压(Dielectric strength)	AC500Vrms 1min (500V AC rms for one minute)		
允许最大转速(Max operating speed)	20000 rpm		
工作温度范围(Operating temperature range)	-40℃ ~ +155℃		

外形及安装尺寸图 Outline(dimension:mm)

定子外形及安装尺寸图

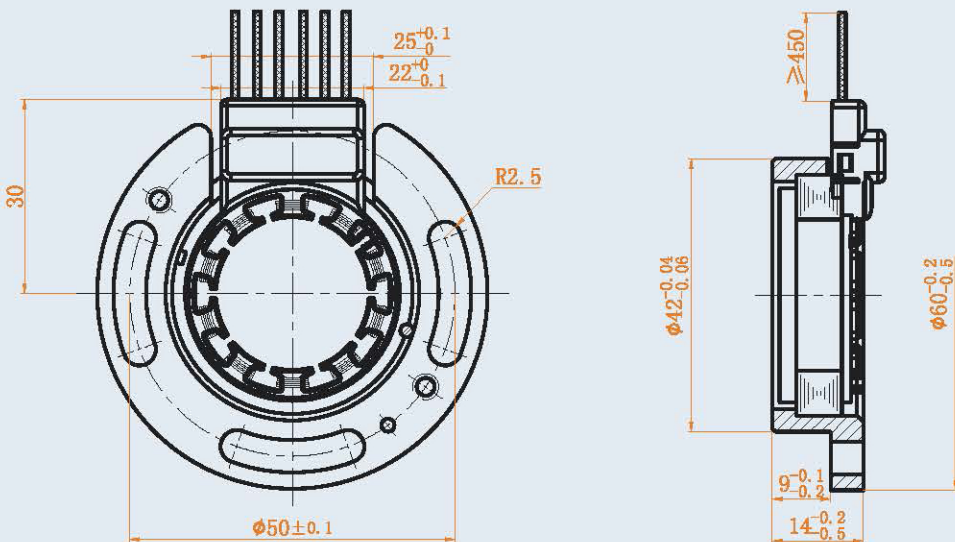

转子外形及安装尺寸图

