



磁阻式/76系列（塑封引线型）




主要参数 (main parameters)

推荐型号 (Recommended models)	J76XU9733 J76XU9734 J76XU9736			
极对数 (Pole)	2	3	4	6
励磁电压 (Input voltage)	AC7Vrms			
励磁频率(Input frequency)	10KHz			
变压比 (Transformation ratio)	0.286±10%			
电气误差 (Accuracy)	60'	40'	30'	20'
相位移 (Phase shift)	0°	≤10°	≤12°	≤5°
输入阻抗(Input impedance)	(160±24)Ω	(120±18)Ω	(140±21)Ω	(120±18)Ω
耐电压(Dielectric strength)	AC 500V 1min			
允许最大转速(Max operating speed)	20000 rpm			
工作温度范围(Operating temperature range)	-40℃~-155℃			

外形及安装尺寸图 Outline (dimension:mm)

◆ 定子外形及安装尺寸图

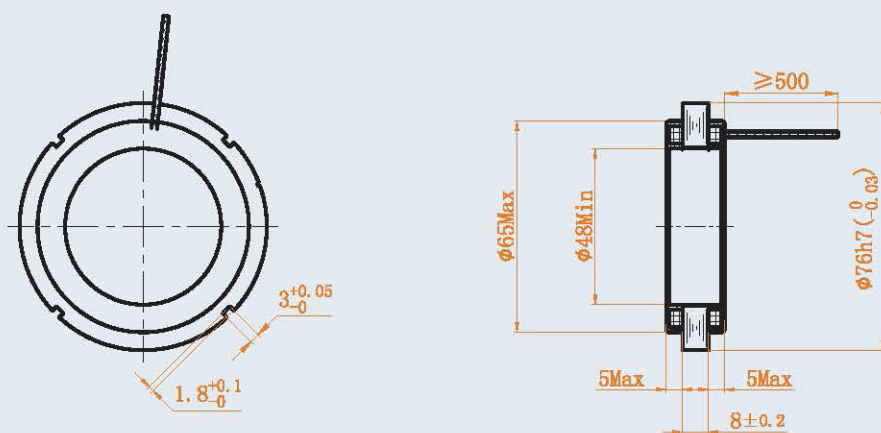

◆ 转子外形及安装尺寸图

